



## VENDED DRYER

Huebsch® vended dryers are durably constructed and extensively tested to ensure optimal performance even when faced with your customers toughest loads. All Huebsch vended dryers feature a durable porcelain enamel top to maintain a lustrous appearance in even the toughest environments.



### FAST DRYING TIMES

Huebsch dryers offer a 7.0 cu. ft. cylinder with an 18 lb capacity offers ample space for large loads to tumble and produce fast drying times, while lowering utility consumption.

### LARGE, REVERSIBLE DOORS

Our dryers boast the industry's largest door opening at 2.06 sq. ft. Dryer doors also are reversible, making it easy to customize your laundry for your customers' convenience.

### SOLID BASE


Huebsch dryers are built on sturdy steel bases to ensure years of worry-free performance.

### UNMATCHED DURABILITY

Our vended dryer is manufactured at our Ripon, WI head-quarters. The entire machine receives Huebsch's standard three-year warranty. In addition, Huebsch has more service representatives in the field than most brands have in their whole organization.

\*Parts only, labor not included. See Huebsch Warranty Bond for specifics.

### MICRO-DISPLAY CONTROL II

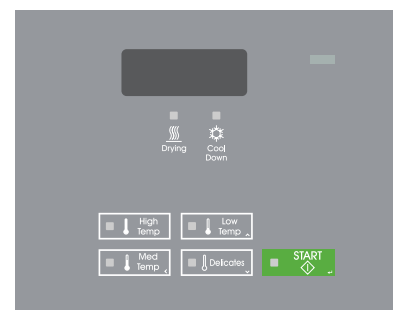

The Micro-Display Control II features a time-remaining countdown, coin countdown and cycle status lights.

# VENDED DRYER

Specifications	Front Control	Rear Control	
Available Controls	MDC II	MDC II	Coin Slide
Models	Electric	HDEBXCAGS173CW01 HDEBCAGS173TW01 HDEBYAGS173CW01	HDEBCRGS173TW01 HDEBYRGS173TW01 HDESXRGS173TW01 HDESXRGS153CW01 HDESXRGS173CW01
	Gas	HDGBXCAGS113CW01 HDGBCAGS113TW01 HDGBYAGS113CW01	HDGBCRGS113TW01 HDGBYRGS113TW01 HDGSXRGS113TW01 HDGSXRGS113CW01
Capacity - lb (kg)	18 (8.2)	18 (8.2)	
Cylinder Volume - cu. Ft. (liters)	7.0 (198)	7.0 (198)	
Width - in (mm)	26.875 (683)	26.875 (683)	
Depth - in (mm)	28 (711)	28 (711)	
Height - in (mm)	44.375 (1126)	43 (1092)	
Motor Size - HP (kw)	0.33 (0.25)	0.33 (0.25)	
Available Heat Sources	Electric or Gas	Electric or Gas	
Available Heating Element (Electric W)	4750 @ 208V 5350 @ 240V	4750 @ 208V 5350 @ 240V	
Gas Inlet Connection - in (mm)	3/8 (9.5)	3/8 (9.5)	
Gas Consumption - BTU/Hr	25,000	25,000	
Exhaust Outlet Diameter - in (mm)	4 (102)	4 (102)	
Exhaust Airflow - cfm (liters/sec)	220 (105)	220 (105)	
Available Cycles*	High, Medium, Low, Delicates	High, Medium, Low, Delicates	
Cycle Indicator Lights	Yes	Yes	
Cylinder Finish	Galvanized	Galvanized	
Available Colors	White	White	
Door Type (Solid/Window)	Solid	Solid	
Available Electrical Requirements - (Voltage/Hz/Ph)	Electric: 120/240/60/1 - 30 Amp Electric: 120/208/60/1 - 30 Amp Gas: 120/60/1 - 15 Amp	Electric: 120/240/60/1 - 30 Amp Electric: 120/208/60/1 - 30 Amp Gas: 120/60/1 - 15 Amp	
Net Weight - lb (kg)	Elec/Gas 150/155 (68/70)	Elec/Gas 135/140 (61/64)	
Shipping Weight - lb (kg)	Elec/Gas 160/165 (73/75)	Elec/Gas 145/150 (66/68)	
Shipping Width - in (mm)	29 (737)	29 (737)	
Shipping Depth - in (mm)	32.75 (832)	32.75 (832)	
Shipping Height - in (mm)	45.5 (1156)	45.5 (1156)	
Available Agency Approvals	Elec: cUL <sub>US</sub> , Gas: cCSA <sub>US</sub>	Elec: cUL <sub>US</sub> , Gas: cCSA <sub>US</sub>	

\* Information shown applies to highest end control available

Note: Not all options are available for all models. Twelfth digit in model number indicates US or Canadian unit. C=Canada & T=US.

Refer to the price list for the available models and options.

Front control unit is ADA Compliant

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©Copyright 2018 Alliance Laundry Systems LLC



14404 Hoover St Westminster, CA 92683  
714-897-4342 1-877-630-7278  
www.ancelaundry.com

