


HARDMOUNT WASHER-EXTRACTORS

GALAXY™ 600 CONTROLS | PREMIUM & VALUE ADD SOLUTIONS

Today's vended laundry customers want easy-to-use machines that produce great wash results and get them in and out fast. Huebsch® hardmount washer-extractors deliver in all those areas to ensure your laundromat is as profitable as it is efficient. In addition, their legendary durability provides peace of mind that the machines will be consistent performers for your business for years to come.

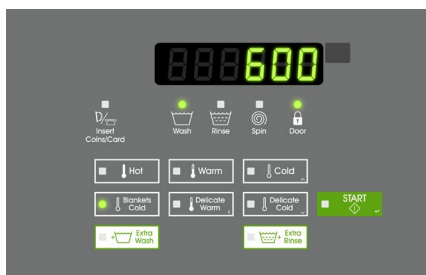

SLATE



CITRON



CITYSCAPE

GALAXY 600 CONTROLS

Laundromats sell convenience and a high-quality wash. With Huebsch Galaxy™ 600 controls, laundromats give customers a user-friendly platform and the flexibility to tailor washes the way they like. Best of all, that flexibility brings additional revenue-generating opportunities.

Galaxy 600 benefits include:

- 24 Cycle combinations
- 30 Water levels
- Multi-level vend
- Cycle modifiers
- Time-of-day pricing



HUEBSCH
COMMAND™
READY

The Huebsch Command™ Technology Suite changes the way you'll run your laundry business. Get unprecedented power over all your business data—


financial, operational, customer, service machine and maintenance—in a single 360-degree control center, enabling you to make informed business decisions and be in command of your business's growth.

- Owner Dashboard
- Customer App
- Point of Sale (POS) System
- Customer Relationship Management (CRM)


PREMIUM STACK TUMBLE DRYERS

GALAXY™ 600 CONTROLS | PREMIUM & VALUE ADD SOLUTIONS

Efficiency means drying more loads, faster. That's how Huebsch® tumble dryers are built to operate in keeping utility costs down and speeds customers through their drying cycle. They also feature an innovative axial airflow process, reducing energy consumption and producing some of the industry's fastest dry times. Faster drying means less time spent at the laundromat and increased customer satisfaction, loyalty and store profits.

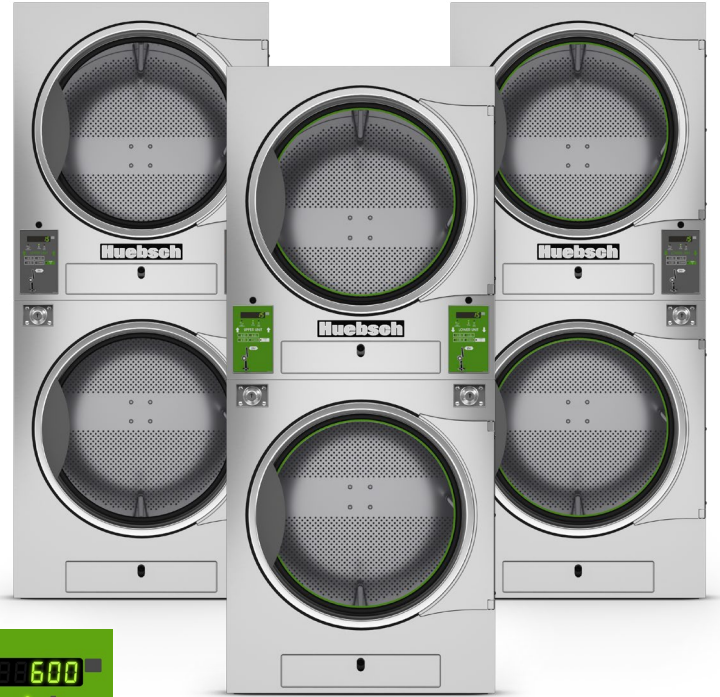

CITYSCAPE / SLATE

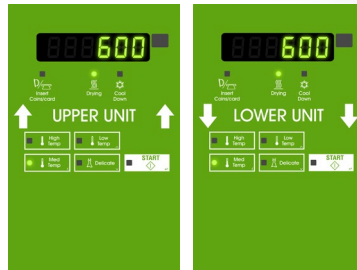

CITRON

GALAXY 600 CONTROLS

Integrating Galaxy™ 600 controls allows for intuitive operation and simple programming throughout your store. Laundromats give customers a user-friendly platform and the flexibility to tailor cycles the way they like. Best of all, that flexibility brings additional revenue-generating opportunities.

Galaxy 600 benefits include:

- Time-of-day pricing
- Service-related audit data
- Four optimized drying cycles
- Programmable cool down



The Huebsch Command™ Technology Suite changes the way you'll run your laundry business. Get unprecedented power over all your business data—

financial, operational, customer, service machine and maintenance—in a single 360-degree control center, enabling you to make informed business decisions and be in command of your business's growth.

- Owner Dashboard
- Customer App
- Point of Sale (POS) System
- Customer Relationship Management (CRM)

GREAT MINDS THINK ALIKE: GALAXY™ 600 WASHER-EXTRACTORS WITH **eBoost™**

At Huebsch, our priority is making commercial laundry equipment that's perfectly aligned with your business philosophy. In other words, because you believe that profit is the inevitable result of superior efficiency, durability, simplicity and service, that's exactly what we deliver.

What's more, we deliver it in every facet of our products...

GALAXY 600 CONTROLS DESIGNED TO IMPROVE YOUR BOTTOM LINE

A VARIETY OF CYCLE SELECTIONS

Six cycle selections and multilevel pricing mean more opportunity for profit, while time-of-day pricing helps increase turns during slow times.

EXTRA WASH AND RINSE KEYS

These options enable customers to tailor wash cycles—at premium vend prices.



Cityscape



Citron



Slate

IT PAYS TO BE EFFICIENT

DISCOVER **eBOOST™**, OUR REVOLUTIONARY TECHNOLOGY

USES 33% LESS ELECTRICITY AND 17% LESS WATER THAN TWO-SPEED MODELS

Our advanced inverter drive technology and improved cylinder and sump system design optimize water use, while reducing non-wash water below the cylinder.

ADVANCED LEAK DETECTION ELIMINATES WASTED WATER

Patented Water Guardian™ leak detection uncovers leaks in both the drain and fill valves, eliminating wasted water—and resources.

HIGH-SPEED EXTRACTION REDUCES DRYING TIME

Our improved technology spins up to 200 G-Force, removing more water. This means shorter dry times and lower energy bills.

HUEBSCH COMMAND™

LAUNDROMAT DATA AND ANALYTICS THAT ARE CUSTOM-MADE FOR THE WAY YOU OPERATE

The Galaxy™ 600 Washer-Extractor is Huebsch Command-compatible. That means you get all features of the Galaxy control—but now you can use them remotely, from anywhere in the world with an internet connection. Huebsch Command also offers a convenient mobile app that not only delivers more flexible payment options, but also a Huebsch Rewards program to inspire greater customer loyalty to your store.



REMOTE START AND SYSTEM MONITORING



SET TIME-OF-DAY/
DAY-OF-WEEK PRICING



MULTILEVEL VEND PRICING CHANGES



ADVANCED PERFORMANCE DATA



TURNS PER DAY



100% SUPPORTED BY HUEBSCH



SERVICE ALERTS VIA EMAIL OR TEXT



CONFIGURE MACHINES FROM THE CLOUD



MOBILE APP PAYMENT FLEXIBILITY



GENERATE CUSTOMER LOYALTY WITH REWARDS

WASH, RINSE – REPEAT BUSINESS

CONVENIENCE AND TIMESAVING FEATURES THAT WILL KEEP YOUR CUSTOMERS COMING BACK

- Simple, intuitive and adjustable controls make our machines easier to operate for the end user, while flexibility in wash and rinse options increase profitability through cost adjustment.
- The ergonomically friendly door handles ensure doors will close easily and lock reliably.
- Our fill-and-forget dispenser lets customers add all their chemicals at once so they'll never forget to add bleach mid-cycle.
- Boost productivity and profits on our largest models, with fill times 43% and 20% faster on the HC60 and HC80 & 100, respectively.

BUILT TO LAST

DURABILITY MEANS LOWER COSTS AND FEWER HEADACHES.

CONTINUED INDUSTRY-LEADING PERFORMANCE

We've made our frames stronger and quieter, our proprietary inverter drive technology provides smooth, reliable power, and our seals and bearings offer seven times the water protection.

TESTED TO THE LIMIT

At Huebsch, we test our machines against the toughest standards in our state-of-the-art test lab, ensuring efficient and reliable commercial-quality machines you can trust in the field.



BACKED BY OUR 10-YEAR LIMITED WARRANTY

Our Galaxy washer-extractors with eBoost are manufactured at our Ripon, Wisconsin, headquarters. We offer an industry-leading, transferable warranty on every product:*

• Frame • Outer Tub • Cylinder • Shaft • Seals and Bearings • Bearing Housing

* Vended products only within the USA and Canada. All other markets consult with your authorized distributor.

Vended Galaxy™ 600 Washer-Extractors specifications

Models		HCT020	HCT030	HCT040	HCT060	HCT080	HCT100
Control Options		Galaxy™ 600	Galaxy™ 600	Galaxy™ 600	Galaxy™ 600	Galaxy™ 600	Galaxy™ 600
Capacity – lb (kg)		20 (9)	30 (13.6)	40 (18)	60 (27)	80 (36)	100 (45)
Overall Width – in (mm)		26 (660)	29 (737)	30.6 (777)	34.1 (866)	41.5 (1054)	41.5 (1054)
*Overall Depth – in (mm)		30.9 (785)	35.3 (897)	42.3 (1074)	44.7 (1135)	47.1 (1196)	51.1 (1298)
Overall Height – in (mm)		43 (1092)	45 (1143)	47.2 (1199)	49.9 (1267)	57.2 (1453)	57.2 (1453)
Cylinder Diameter – in (mm)		21 (533)	24 (610)	26.3 (668)	30 (762)	36 (914)	36 (914)
Cylinder Depth – in (mm)		13.8 (351)	16 (406)	20.3 (516)	22 (559)	21.9 (556)	25.9 (658)
Cylinder Volume – cu ft (liters)		2.8 (79)	4.2 (119)	6.3 (178)	9 (225)	12.9 (365)	15.2 (430)
Door Opening Size – in (mm)		11.6 (295)	14.3 (363)	16.3 (414)	16.3 (414)	18.5 (470)	18.5(470)
Door Bottom to Floor – in (mm)		14.4 (366)	14 (356)	14.6 (371)	14.9 (378)	17.9 (455)	17.9 (455)
Water Inlet Connection – in (mm)		2 x 0.75 (19)	2 x 0.75 (19)	2 x 0.75 (19)	2 x 0.75 (19)	2 x 0.75 (19)	2 x 0.75 (19)
Drain Diameter – in (mm)		1 x 3 (76)	1 x 3 (76)	1 x 3 (76)	1 x 3 (76)	1 x 3 (76)	1 x 3 (76)
Drain Height to Floor – in (mm)		3.9 (99)	4.3 (109)	4.5 (114)	4.9 (124)	5.1 (130)	5.1 (130)
Motor Power Consumption – HP(kW)		1 (0.75)	1 (0.75)	2 (1.5)	3 (2.2)	5 (3.7)	5 (3.7)
Total # of Speeds		6, 9	6, 9	6, 9	6, 9	6, 9	6, 9
Cylinder Speeds – RPM (G-Force)							
		Gentle	37 (0.4)	34 (0.4)	33 (0.4)	31 (0.4)	28 (0.4)
		Wash	51 (0.8)	48 (0.8)	46 (0.8)	43 (0.8)	39 (0.8)
		Distribution	92 (2.5)	86 (2.5)	82 (2.5)	77 (2.5)	70 (2.5)
		Very Low	301 (27)	282 (27)	269 (27)	252 (27)	230 (27)
		Low	518 (80)	485 (80)	464 (80)	434 (80)	396 (80)
		Medium	579 (100)	542 (100)	518 (100)	485 (100)	443 (100)
		High	648 (125)	606 (125)	579 (125)	542 (125)	495 (125)
		Very High	710 (150)	664 (150)	635 (150)	594 (150)	542 (150)
		Ultra High	819 (200)	766 (200)	733 (200)	686 (200)	626 (200)
** Voltage/ Circuit Breaker - FLA	B	120/60/1	15-9	15-12	20-15	N/A	N/A
	X	200-240/50-60/1/3	15-4 (1 Ph) 15-3 (3 Ph)	15-7 (1 Ph) 15-4 (3 Ph)	15-7 (1 Ph) 15-4 (3 Ph)	15-11 (1 Ph) 15-7 (3 Ph)	20-15 (1 Ph) 15-9 (3 Ph)
	Y	200-240/60/1/3 (Pump Drain Only)	15-4 (1 Ph)	15-7 (1 Ph) 15-4 (3 Ph)	15-7 (1 Ph) 15-4 (3 Ph)	N/A	N/A
	N	440-480/50-60/3	15-2	15-3	15-3	15-4	15-6
Shipping Dimensions Approx. – in (mm)		Width	28 (711)	31.5 (800)	32.5 (826)	37.5 (953)	44 (1118)
		Depth	33.8 (859)	38.3 (973)	43.5 (1105)	46.9 (1191)	54.5 (1384)
		Height	49.4 (1255)	51.3 (1303)	53.6 (1361)	56.3 (1430)	59.6 (1514)
Net Weight – lb (kg)		340 (154)	440 (200)	540 (245)	680 (308)	1250 (567)	1280 (581)
Shipping Weight – lb (kg)		380 (172)	480 (218)	580 (263)	720 (327)	1300 (590)	1330 (603)
Slat Crate Shipping Weight – lb (kg)		460 (209)	580 (263)	680 (308)	840 (381)	1430 (649)	1460 (662)
***Agency Approvals		cULus	cULus	cULus	cULus	cULus	cULus

*Overall depth includes vacuum breaker to door handle.

** Circuit breaker and amp draw data shown are for models without electric heat. Consult factory for other configurations. Manufacturer strongly recommends using a circuit breaker instead of fuses. Use 3-pole circuit breakers for 3-phase machines.

***Agency approvals may vary depending on configuration. Steam connection requires ½" N.P.T. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2000.

Authorized Distributor:
**ACE Commercial Laundry
Equipment Inc**

1-877-630-7278
14404 Hoover St Westminster, CA 92683
www.ace laundry.com



Vended **Stack & Single Tumble Dryer** Specifications

Models	HTT30	HTT45	HT050	HT075
Control Options	Galaxy™ 600/500	Galaxy™ 600/500	Galaxy™ 600/500	Galaxy™ 600/500
Capacity – lb (kg)	30 (13) x 2	45 (20) x 2	50 (25)	75 (34)
Width – in (mm)	31.5 (800)	34.5 (875)	38.5 (980)	38.5 (980)
Depth – in (mm)	42.8 (1090)	48.6 (1235)	46.8 (1190)	53.0 (1350)
Height – in (mm)	76.3 (1940)	81.3 (2065)	77.3 (1960)	77.3 (1960)
Cylinder Depth – in (mm)	26.0 (660)	30.0 (762)	30.0 (762)	36.0 (914)
Cylinder Diameter – in (mm)	30.0 (762)	33.0 (838)	37.0 (940)	37.0 (940)
Cylinder Volume – cu ft (liters)	10.6 (300)	14.8 (420)	18.7 (530)	22.4 (634)
Reversing Cylinder	Standard	Standard	Standard	Standard
Door Opening Size – in (mm)	22.6 (574)	26.9 (683)	26.9 (683)	26.9 (683)
Air Outlet – in (mm)	1 x 8 (200) Oval	1 x 10 (250) Oval	8 (200)	8 (200)
Motor - HP	Fan	0.5	0.5	0.5
	Cylinder	0.3	0.5	0.5
Airflow – cfm (liters/sec)	2 x 400	2 x 600	700	800
Heat Input Power - Per Pocket – Btu/hr	73,000 x 2	95,000 x 2	122,000	165,000
Gas Connections* – in (mm)	0.5	0.5	0.5	0.5
Electrical Specs - amps	(B) 100-120V/50/60/1	16	20	9
	(X) 200-240V/50/60/1/3	9	12	6
Shipping Dimensions Approx. – in (mm)	Width	32.5 (826)	35.5 (902)	41.5 (1054)
	Depth	47.0 (1194)	54.0 (1372)	50.0 (1270)
	Height	79.9 (2029)	84.9 (2156)	81.0 (2057)
Net Weight – lb (kg)	570 (260)	710 (320)	660 (299)	690 (313)
Shipping Weight – lb (kg)	600 (270)	750 (340)	710 (322)	740 (336)
Agency Approvals	CSA	CSA	CSA	CSA



Authorized Distributor:
ACE Commercial Laundry Equipment Inc
 1-877-630-7278
 14404 Hoover St Westminister, CA 92683
www.ancelaundry.com



Vended **Stack & Single Tumble Dryer** Specifications

Models	HT030	HT035	HT055
Control Options	Galaxy™ 600/500	Galaxy™ 600/500	Galaxy™ 600/500
Capacity – lb (kg)	30 (13)	35 (16)	55 (24)
Width – in (mm)	27.9 (710)	31.5 (800)	34.5 (876)
Depth – in (mm)	45.5 (1155)	45.5 (1155)	53.1 (1350)
Height – in (mm)	63.9 (1625)	63.9 (1625)	66.7 (1700)
Cylinder Depth – in (mm)	30.0 (762)	30.0 (762)	35.0 (889)
Cylinder Diameter – in (mm)	26.5 (673)	30 (762)	33 (838)
Cylinder Volume – cu ft (liters)	9.6 (270)	12.3 (350)	17.3 (490)
Reversing Cylinder	Standard	Standard	Standard
Door Opening Size – in (mm)	22.7 (577)	22.7 (577)	26.9 (683)
Air Outlet – in (mm)	6 (152)	8 (200)	8 (200)
Motor - HP	Fan 0.5	0.5	0.5
	Cylinder 0.3	0.3	0.5
Airflow – cfm (liters/sec)	500	600	700
Heat Input Power - Per Pocket – Btu/hr	73,000	90,000	112,000
Gas Connections* – in (mm)	0.5	0.5	0.5
Electrical Specs - amps	(B) 100-120V/50/60/1 10	10	12
	(X) 200-240V/50/60/1/3 6	6	7
Shipping Dimensions Approx. – in (mm)	Width 30.0 (762)	33.0 (838)	35.5 (902)
	Depth 49.0 (1245)	49.0 (1245)	57 (1448)
	Height 67.6 (1717)	67.6 (1717)	70.5 (1791)
Net Weight – lb (kg)	320 (145)	340 (155)	430 (195)
Shipping Weight – lb (kg)	340 (155)	360 (165)	470 (215)
Agency Approvals	CSA	CSA	CSA

* LP gas available for 50, 75 lb capacities only. Field conversion kits available for other capacities.

Tumble dryer models are made to suit a variety of electrical service characteristics. See your Huebsch distributor for specifications. For further details on installation, refer to Installation, Operation and Maintenance instructions supplied with the tumble dryer. USA and Canada models are certified by CSA International.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems of Alliance Laundry Systems are registered to ISO 9001.



Authorized Distributor:
ACE Commercial Laundry Equipment Inc

1-877-630-7278
 14404 Hoover St Westminster, CA 92683
www.ancelaundry.com