



VENDED TOP LOAD WASHER

Huebsch® top load vended washers combine low water usage with a higher spin speed to offer owners maximum energy efficiency and performance. No top load washer promises more energy efficiency than Huebsch, with utility savings, spin speeds and advanced controls that consistently outperform the competition.

LOW WATER USE

Huebsch top load washers offer owners a Water Saver Cycle that averages just 24.6 gallons of water per cycle. An owner-adjustable pressure switch can lower those figures by an additional 10%.

HIGH SPIN SPEED

With an industry-best final spin of 710 RPM, Huebsch top load washers remove more water from loads than many competing models. The end result is reduced drying times for customers and lower utility consumption for store owners.


HEAVY-DUTY POWER

Our top load washer is powered by a heavy-duty 1/2 horse-power motor. The washer performance is further fortified by an automatic balance system, which ensures cycles aren't interrupted by unbalanced loads.

UNMATCHED DURABILITY

Our vended top load washer is manufactured at our Ripon, WI headquarters. The entire machine receives Huebsch's standard three-year warranty. In addition, Huebsch has more service representatives in the field than most brands have in their whole organization.

*Parts only, labor not included. See Huebsch Warranty Bond for specifics.

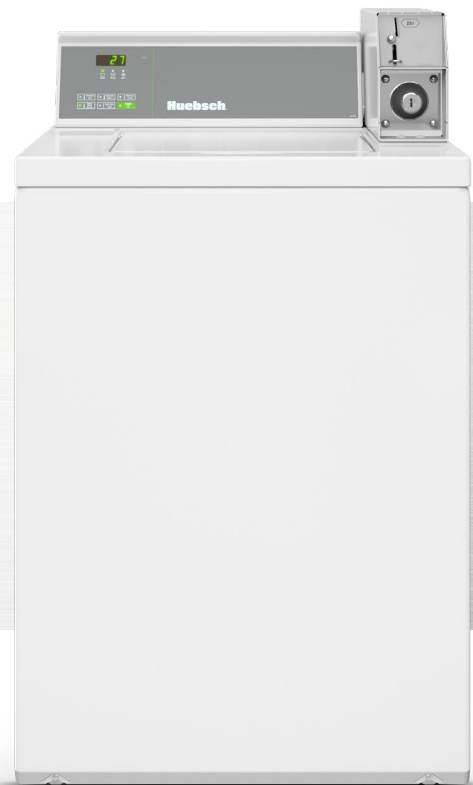

MICRO-DISPLAY CONTROL II



The Micro-Display Control II features a time-remaining countdown, coin countdown and cycle status lights.

VENDED TOP LOAD WASHER

Specifications		
Available Controls	MDC II	Coin Slide
Models	HWNBX2PP115TW01 HWNBC2PP115TW01 HWNBD2SP115CW01 HWNBE2SP115CW01 HWNBY2SP115CW01	HWNSX2PP115TW01
Capacity - lb (kg)	16 (7.3)	
Cylinder Volume - cu. Ft. (liters)	3.19 (90.3)	
Width - in (mm)	25.63 (650)	
Depth - in (mm)	28 (711)	
Height - in (mm)	43 (1092)	
Spin Speed - G-Force (RPM)	150 (710)	
Motor Size - HP (kw)	0.5 (0.37)	
Water Consumption per Cycle* - g (l)	28.07 (106)	
IWF (Water Factor)	8.8	
IMEF (Modified Energy Factor)	1.35	
Available Water Temperatures	3	
Available Cycles*	Normal, Perm Press, Delicate	
Water Pressure - PSI (Bar)	20-120 (1.4/8.3)	
Cycle Indicator Lights	Yes	
Cylinder Finish	Stainless Steel, Porcelain	
Available Colors	White	
Available Electrical Requirements - (Voltage/Hz/Ph)	120/60/1 - 15 Amp	
Net Weight - lb (kg)	190 (86)	
Shipping Weight - lb (kg)	210 (95)	
Shipping Width - in (mm)	27.5 (699)	
Shipping Depth - in (mm)	30 (762)	
Shipping Height - in (mm)	44.25 (1124)	
Available Agency Approvals	cUL _{us}	



* Information shown applies to highest end control available
 Note: Not all options are available for all models. Twelfth digit in model number indicates US or Canadian unit. C=Canada & T=US.
 Refer to the price list for the available models and options.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©Copyright 2018 Alliance Laundry Systems LLC



14404 Hoover Street Westminster, CA 92683
 714-897-4342 1-877-630-7278
www.ancelaundry.com



AH18-0029



VENDED DRYER

Huebsch® vended dryers are durably constructed and extensively tested to ensure optimal performance even when faced with your customers toughest loads. All Huebsch vended dryers feature a durable porcelain enamel top to maintain a lustrous appearance in even the toughest environments.



FAST DRYING TIMES

Huebsch dryers offer a 7.0 cu. ft. cylinder with an 18 lb capacity offers ample space for large loads to tumble and produce fast drying times, while lowering utility consumption.

LARGE, REVERSIBLE DOORS

Our dryers boast the industry's largest door opening at 2.06 sq. ft. Dryer doors also are reversible, making it easy to customize your laundry for your customers' convenience.

SOLID BASE


Huebsch dryers are built on sturdy steel bases to ensure years of worry-free performance.

UNMATCHED DURABILITY

Our vended dryer is manufactured at our Ripon, WI head-quarters. The entire machine receives Huebsch's standard three-year warranty. In addition, Huebsch has more service representatives in the field than most brands have in their whole organization.

*Parts only, labor not included. See Huebsch Warranty Bond for specifics.

MICRO-DISPLAY CONTROL II

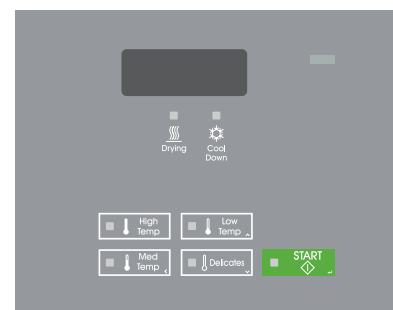

The Micro-Display Control II features a time-remaining countdown, coin countdown and cycle status lights.

VENDED DRYER

Specifications	Front Control	Rear Control	
Available Controls	MDC II	MDC II	Coin Slide
Models	Electric	HDEBXAGS173CW01 HDEBCAGS173TW01 HDEBYAGS173CW01	HDEBCRGS173TW01 HDEBYRGS173TW01 HDESXRGs173CW01 HDESXRGs153CW01
	Gas	HDGBXAGS113CW01 HDGBCAGS113TW01 HDGBYAGS113CW01	HDGBCRGS113TW01 HDGBYRGS113TW01 HDGSXRGs113TW01 HDGSXRGs113CW01
Capacity - lb (kg)	18 (8.2)	18 (8.2)	
Cylinder Volume - cu. Ft. (liters)	7.0 (198)	7.0 (198)	
Width - in (mm)	26.875 (683)	26.875 (683)	
Depth - in (mm)	28 (711)	28 (711)	
Height - in (mm)	44.375 (1126)	43 (1092)	
Motor Size - HP (kw)	0.33 (0.25)	0.33 (0.25)	
Available Heat Sources	Electric or Gas	Electric or Gas	
Available Heating Element (Electric W)	4750 @ 208V 5350 @ 240V	4750 @ 208V 5350 @ 240V	
Gas Inlet Connection - in (mm)	3/8 (9.5)	3/8 (9.5)	
Gas Consumption - BTU/Hr	25,000	25,000	
Exhaust Outlet Diameter - in (mm)	4 (102)	4 (102)	
Exhaust Airflow - cfm (liters/sec)	220 (105)	220 (105)	
Available Cycles*	High, Medium, Low, Delicates	High, Medium, Low, Delicates	
Cycle Indicator Lights	Yes	Yes	
Cylinder Finish	Galvanized	Galvanized	
Available Colors	White	White	
Door Type (Solid/Window)	Solid	Solid	
Available Electrical Requirements - (Voltage/Hz/Ph)	Electric: 120/240/60/1 - 30 Amp Electric: 120/208/60/1 - 30 Amp Gas: 120/60/1 - 15 Amp	Electric: 120/240/60/1 - 30 Amp Electric: 120/208/60/1 - 30 Amp Gas: 120/60/1 - 15 Amp	
Net Weight - lb (kg)	Elec/Gas 150/155 (68/70)	Elec/Gas 135/140 (61/64)	
Shipping Weight - lb (kg)	Elec/Gas 160/165 (73/75)	Elec/Gas 145/150 (66/68)	
Shipping Width - in (mm)	29 (737)	29 (737)	
Shipping Depth - in (mm)	32.75 (832)	32.75 (832)	
Shipping Height - in (mm)	45.5 (1156)	45.5 (1156)	
Available Agency Approvals	Elec: cUL _{US} , Gas: cCSA _{US}	Elec: cUL _{US} , Gas: cCSA _{US}	

* Information shown applies to highest end control available
 Note: Not all options are available for all models. Twelfth digit in model number indicates US or Canadian unit. C=Canada & T=US.
 Refer to the price list for the available models and options.
 Front control unit is ADA Compliant

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©Copyright 2018 Alliance Laundry Systems LLC



14404 Hoover St Westminster, CA 92683
 714-897-4342 1-877-630-7278
www.ancelaundry.com





VENDED STACK WASHER/DRYER

Huebsch® stack washer/dryers are easy to install and offer all the innovative features of standard machines while only taking up half of the floor space, adding flexibility to your laundry design. The all-new front load washer offers a 20% larger capacity and is more powerful than ever. The front load washer is equipped with innovation that delivers ultimate efficiency, lowering your utility bills and making more money for you over the lifetime of your equipment. Stacked on top is our vended dryer that has been durably constructed and extensively tested to ensure optimal performance.



CUTTING-EDGE BALANCING TECHNOLOGY

An updated suspension and new sensing technologies powerfully combine to redistribute loads and maintain cycle times — resulting in less utility costs and shorter wait times.

INCREDIBLE 440 G-FORCE

Increased spin speed exerts high G-Force to maximize moisture removal and lower drying times, getting customers in and out of your store faster and ensuring they leave satisfied.

FAST DRYING TIMES

Huebsch dryers offer a 7.0 cu. ft. cylinder with an 18 lb capacity offers ample space for large loads to tumble and produce fast drying times, while lowering utility consumption.

SPACE SAVINGS


A stack washer/dryer gives your vended laundry all the benefits of two stand-alone dryers in the space of one machine. The stack utilizes all the same connections as a standard dryer, so there are no special hookups required.

UNMATCHED DURABILITY

Our vended stack washer/dryer is manufactured at our Ripon, WI headquarters. The entire machine receives Huebsch's standard three-year warranty. In addition, Huebsch has more service representatives in the field than most brands have in their whole organization.

*Parts only, labor not included. See Huebsch Warranty Bond for specifics.

MICRO-DISPLAY CONTROL

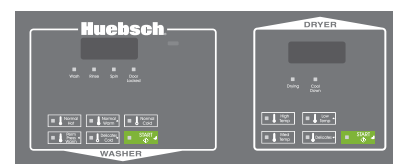

The Micro-Display Control features a time-remaining countdown, coin countdown and cycle status lights.

VENDED STACK WASHER/DRYER

Specifications	Washer	Dryer
Available Controls	MDC	
Models	Electric	HTEBCASP173TW01, HTEBXASP283CW01, HTEBXASP293CW01, HTEBYASP283CW01
	Gas	HTGBCASP113TW01, HTGBYASP113TW01, HTGBDASP093CW01, HTGBXASP093CW01, HTGBYASP093CW01
Capacity - lb (kg)	21.5 (9.5)	18 (8.2)
Cylinder Volume - cu. Ft. (liters)	3.42 (96.8)	7.0 (198)
Width - in (mm)	26 7/8 (683)	
Depth - in (mm)	27 3/4 (704)	
Height - in (mm)	78 3/16 (1986)	
Spin Speed - G-Force (RPM)	440 (1200)	N/A
Motor Size - HP (kw)	Variable Speed Induction 0.9 (0.67)	1/3 (0.25)
Water Consumption per Cycle* - g (l)	11.7 (44.3)	N/A
WF (Water Factor)	3.8	N/A
MEF (Modified Energy Factor)	2.98	N/A
Available Heat Sources	N/A	Electric or Gas
Available Heating Element (Electric W)	N/A	4750 @ 208V 5350 @ 240V
Gas Inlet Connection - in (mm)	N/A	3/8 (9.5)
Gas Consumption - BTU/Hr	N/A	25,000
Exhaust Outlet Diameter - in (mm)	N/A	4 (102)
Exhaust Airflow - cfm (liters/sec)	N/A	220 (105)
Available Water Temperatures	3	N/A
Available Cycles*	Normal, Perm Press, Delicate	High, Medium, Low, Delicates
Water Pressure - PSI (Bar)	20-120 (1.4/8.3)	N/A
Cycle Indicator Lights	Yes	
Cylinder Finish	Stainless Steel	Galvanized
Available Colors	White	
Door Type (Solid/Window)	Window	
Available Electrical Requirements - (Voltage/Hz/Ph)	120/60/1 - 15 Amp	Electric: 120/240/60/1 - 30 Amp Electric: 120/208/60/1 - 30 Amp Gas: 120/60/1 - 15 Amp
Net Weight - lb (kg)	390 (177)	
Shipping Weight - lb (kg)	425 (193)	
Shipping Width - in (mm)	29 (737)	
Shipping Depth - in (mm)	32 3/4 (832)	
Shipping Height - in (mm)	80 (2032)	
Available Agency Approvals	c ^{UL} _{US}	Elec: c ^{UL} _{US} , Gas: c ^{CSA} _{US}

* Information shown applies to highest end control available
 Note: Not all options are available for all models. Twelfth digit in model number indicates US or Canadian unit. C=Canada & T=US.
 Refer to the price list for the available models and options.
 Lower unit is ADA Compliant

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©Copyright 2015 Alliance Laundry Systems LLC

Alliance Laundry Systems LLC
 Shepard Street
 Ripon, WI 54971
 1-800-553-5120
 huebsch.com





VENDED STACK DRYER

Huebsch® stack dryer/dryers give your laundry all the benefits of two stand-alone dryers in the space of one machine. The stack utilizes all the same connections as a standard dryers, so there are no special hookups required.

FAST DRYING TIMES

Huebsch dryers offer a 7.0 cu. ft. cylinder with an 18 lb capacity offers ample space for large loads to tumble and produce fast drying times, while lowering utility consumption.

SOLID BASE

Huebsch dryers are built on sturdy steel bases to ensure years of worry-free performance.

SPACE SAVINGS

A stack dryer/dryer gives your vended laundry all the benefits of two stand-alone dryers in the space of one machine. The stack utilizes all the same connections as a standard dryer, so there are no special hookups required.


UNMATCHED DURABILITY

Our vended stack dryer is manufactured at our Ripon, WI headquarters. The entire machine receives Huebsch's standard three-year warranty. In addition, Huebsch has more service representatives in the field than most brands have in their whole organization.

*Parts only, labor not included. See Huebsch Warranty Bond for specifics.



MICRO-DISPLAY CONTROL II

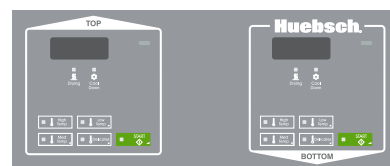

The Micro-Display Control II features a time-remaining countdown, coin countdown and cycle status lights.

VENDED STACK DRYER

Specifications			
Available Controls	MDC II	Coin Slide	
Models	Electric	HSEBCAGW173TW01 HSEBYAGW173TW01 HSEBEAGW293CW01 HSEBDAGW293CW01 HSEBYAGW283CW01 HSEBYAGW293CW01	HSEXAGW173TW01
	Gas	HSGBCAGW113TW01 HSGBYAGW113TW01 HSGBEAGW093CW01 HSGBDAGW093CW01 HSGBXAGW093CW01 HSGBYAGW093CW01	HSGSXAGW113TW01 HSGSXAGW093CW01
Capacity - lb (kg)	18 (8.2)		
Cylinder Volume - cu. Ft. (liters)	7.0 (198)		
Width - in (mm)	26.875 (683)		
Depth - in (mm)	28 (711)		
Height - in (mm)	78.19 (1986)		
Motor Size - HP (kw)	0.33 (0.25)		
Available Heat Sources	Electric or Gas		
Available Heating Element - (Electric W)	4750 @ 208V 5350 @ 240V		
Gas Inlet Connection - in (mm)	3/8 (9.5)		
Gas Consumption - BTU/Hr	25,000		
Exhaust Outlet Diameter - in (mm)	4 (102)		
Exhaust Airflow - cfm (liters/sec)	220 (105)		
Available Cycles*	High, Medium, Low, Delicates		
Cycle Indicator Lights	Yes		
Cylinder Finish	Galvanized		
Available Colors	White		
Door Type (Solid/Window)	Solid or Window		
U.S. Electrical Requirements - (Voltage/Hz/Ph)	Electric: 120/240/60/1 - 30 Amp Electric: 120/208/60/1 - 30 Amp Gas: 120/60/1 - 15 Amp		
Canada Electrical Requirements - Single Supply Cord (Voltage/Hz/Ph)	Electric: 120/240/60/1 - 60 Amp Electric: 120/208/60/1 - 60 Amp Gas: 120/60/1 - 20 Amp		
Net Weight - lb (kg)	Elec/Gas 265/275 (120/125)		
Shipping Weight - lb (kg)	Elec/Gas 280/290 (127/132)		
Shipping Width - in (mm)	29 (737)		
Shipping Depth - in (mm)	32 3/4 (832)		
Shipping Height - in (mm)	80 (2032)		
Available Agency Approvals	Elec: ^c UL _{US} , Gas: ^c CSA _{US}		

* Information shown applies to highest end control available
 Note: Not all options are available for all models. Twelfth digit in model number indicates US or Canadian unit. C=Canada & T=US.
 Refer to the price list for the available models and options.
 Lower unit is ADA compliant

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©Copyright 2018 Alliance Laundry Systems LLC



Vended Front Load Washer with Galaxy 600™



At Huebsch, our priority is making commercial laundry equipment that's perfectly aligned with your business philosophy. In other words, because you believe that profit is the inevitable result of superior efficiency, durability, simplicity and service, that's exactly what we deliver.

CUTTING-EDGE BALANCE SENSING SYSTEM

An updated suspension and new sensing technologies combine to redistribute loads and maintain cycle times—resulting in reduced utility costs, shorter wait times and increased turns through your store.

10-DEGREE TILTED CONTROL PANEL

Improved control visibility and ease-of-use make for an ideal user experience.

INCREDIBLE 440 G-FORCE

Increased spin speed maximizes moisture removal and reduces drying times, getting customers in and out of your store faster—and ensuring they leave satisfied.

INNER & OUTER STAINLESS-STEEL TUBS

Built to be virtually indestructible.

UNMATCHED DURABILITY

Built with premium materials and tested to meet the demands of the harshest environments, these commercial-grade machines deliver reliable, efficient operation load after load—and they're backed up by Huebsch's standard three-year warranty.*

20% LARGER CAPACITY

Increased capacity means bigger loads, which allow for higher vend pricing. In addition, improved water and energy efficiencies lower utility bills and keep more money in your pocket.

GALAXY™ 600 CONTROLS

Integrating Galaxy 600 controls allows for intuitive operation and simple programming throughout your store with revenue-boosting options. Better yet, it means your Vended Front Load Washer is Huebsch Command-compatible.

- Capacitive Touch buttons are durable, inside and out, and reliable for years of use without looking worn
- White LED lights on buttons
- Integrated Wifi
- NFC allows programming using your phone/tablet, Android only

*Parts only, labor not included. See Huebsch Warranty Bond for specifics.



The Huebsch Command™ Technology Suite changes the way you'll run your laundry business. Get unprecedented power over all your business data—financial, operational, customer, service machine and maintenance—in a single 360-degree control center, enabling you to make informed business decisions and be in command of your business's growth.

- **Owner Dashboard**
- **Customer App**
- **Customer Relationship Management (CRM)**

Vended **Galaxy™ 600 Front Load Washer** specifications

Specifications	
Models	Slate - White HFNKCASG116TW01, HFNKCASP116TW01
Color	White
Control Location	Front
Capacity - lb (kg)	21.5 (9.5)
Cylinder Volume - cu. ft. (liters)	3.42 (96.8)
Width - in (mm)	26.9 (683)
Depth - in (mm)	27.75 (704)
Height - in (mm)	44.38 (1126)
Maximum Spin Speed - G-Force (RPM)	440 (1200)
Motor Size - HP (kw)	Variable Speed Induction 0.9 (0.67)
Water Consumption per Cycle* - g (l)	13.68
WF (Water Factor)	4
MEF (Modified Energy Factor)	2.20
Available Water Temperatures	3
Available Cycles*	Hot, Warm, Cold, Blankets, Delicate Warm, Delicate Cold
Water Pressure - PSI (Bar)	20-120 (1.4/8.3)
Cycle Indicator Lights	Yes
Cylinder Finish	Stainless Steel
Available Colors	White
Door Type (Solid/Window)	Window
Available Electrical Requirements -(Voltage/Hz/Ph)	100-120/60/1 - 15 Amp
Net Weight - lb (kg)	260 (118)
Shipping Weight - lb (kg)	270 (122)
Shipping Width - in (mm)	30 (762)
Shipping Depth - in (mm)	34 (864)
Shipping Height - in (mm)	45.5 (1156)
Available Agency Approvals	cUL _{us}

* Information shown applies to highest end control available.

Note: Not all options are available for all models.

Twelfth digit in model number indicates US or Canadian unit. C=Canada & T=US.

Refer to the price list for the available models and options.

Front control unit is ADA Compliant.

Aesthetic conversion package available.

Authorized Distributor

Distributed By:
1-877-630-7278
www.ace laundry.com



ENERGY STAR®
Certified Washer

For a complete listing of ENERGY STAR compliant models please visit:
www.energystar.gov



For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.